



Emblème



Position de fonctionnement: Verticale

Operating position: Vertical

	Emblème porté On top Emblème	Emblème suspendu Suspended Emblème
A (mm)	473	473
B (mm)	598	650
C (mm)	543	595
Masse (kg) Weight	11.8	12.4
ScX (m ²)	0.105	0.105



Si le câble extérieur, la source lumineuse ou le driver contenus dans ce luminaire sont endommagés, ils doivent être exclusivement remplacés par le fabricant, son agent de maintenance ou une personne de qualification équivalente, cela afin d'éviter tout risque.


If the external cable, light source or driver contained in this light are damaged, they have to be exclusively replaced by the manufacturer, his maintenance agent or an equally qualified worker, in order to avoid any risk.



1


Porté / Top mounted

Suspendu / Suspended

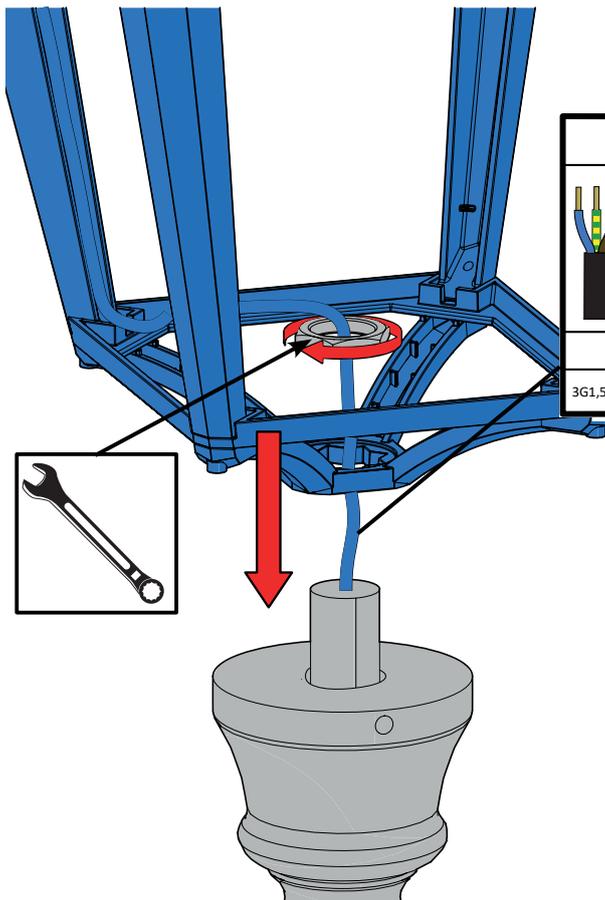


**Couple de serrage
Tightening torque
32 N.m**

CI I		CI II	
HO7 RNF			
3G1,5 mm ²	5G1,5 mm ²	2x1,5 mm ²	4x1,5 mm ²

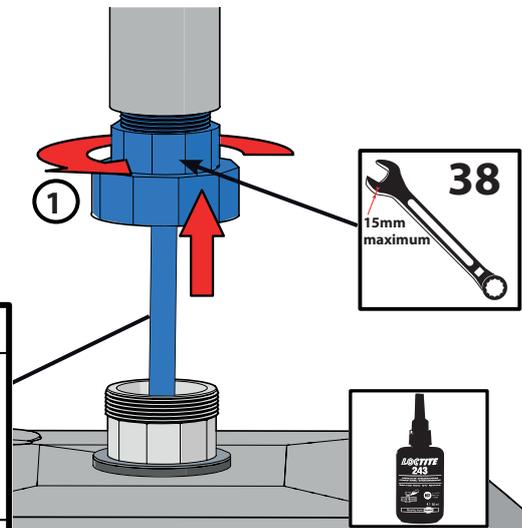


**Couple de serrage
Tightening torque
32 N.m**

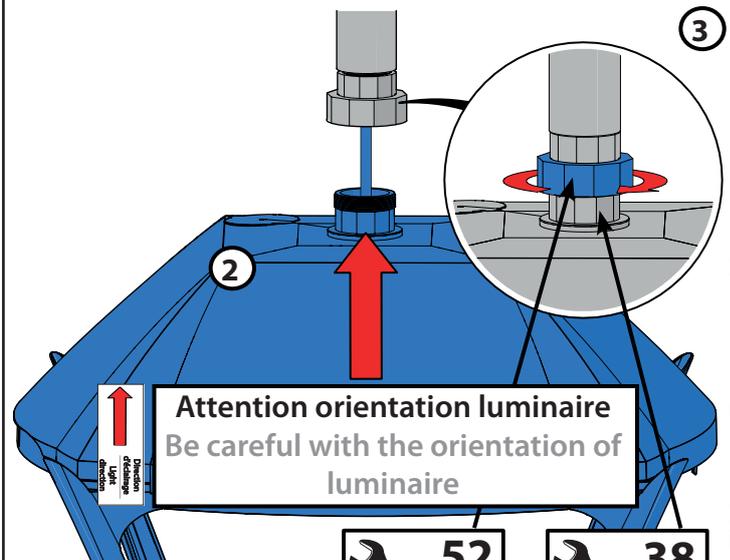

**Couple de serrage
Tightening torque
32 N.m**




Serrer
Tighten




Maintenir
Hold

2

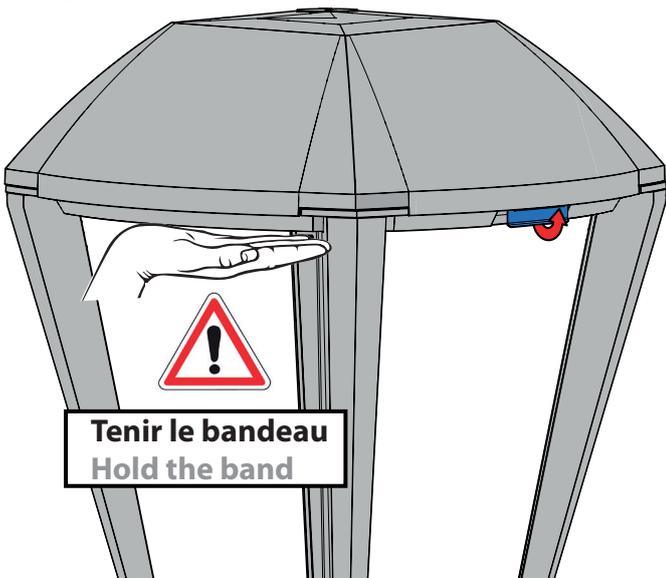



3

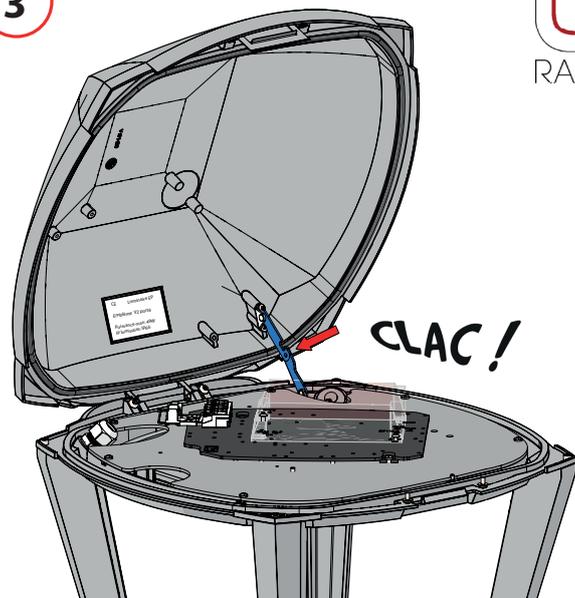


4

Porté / Top mounted

Suspendu / Suspended

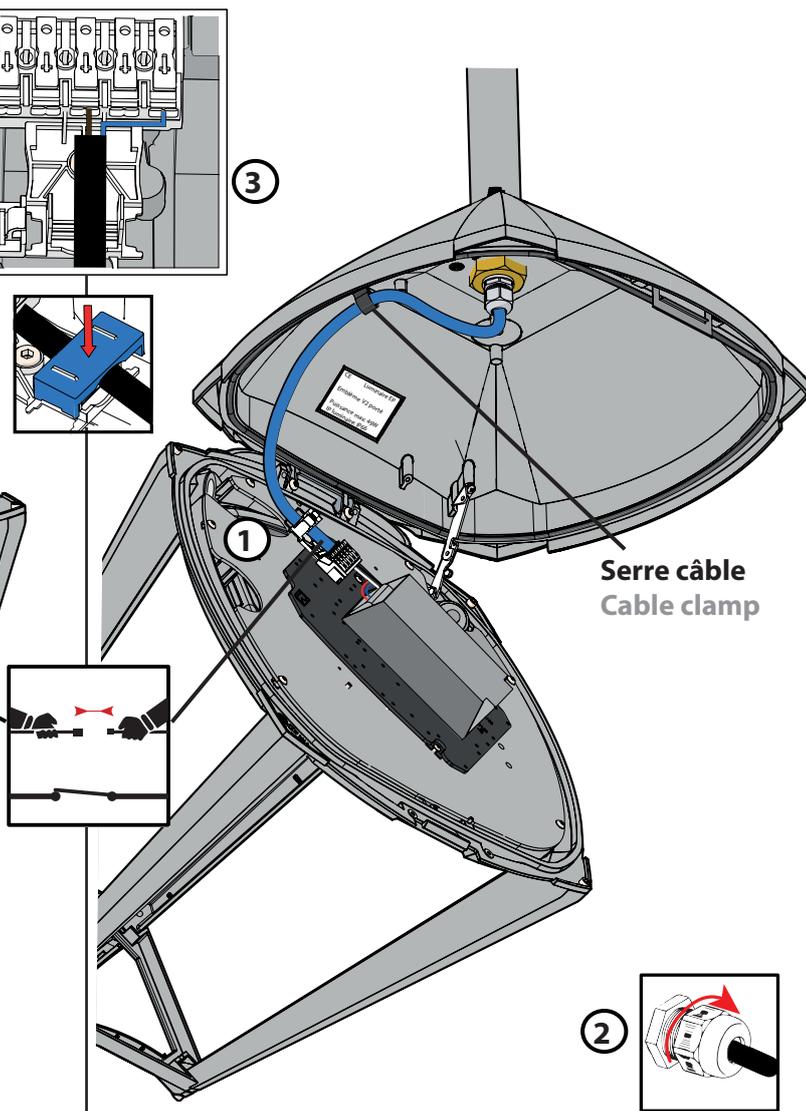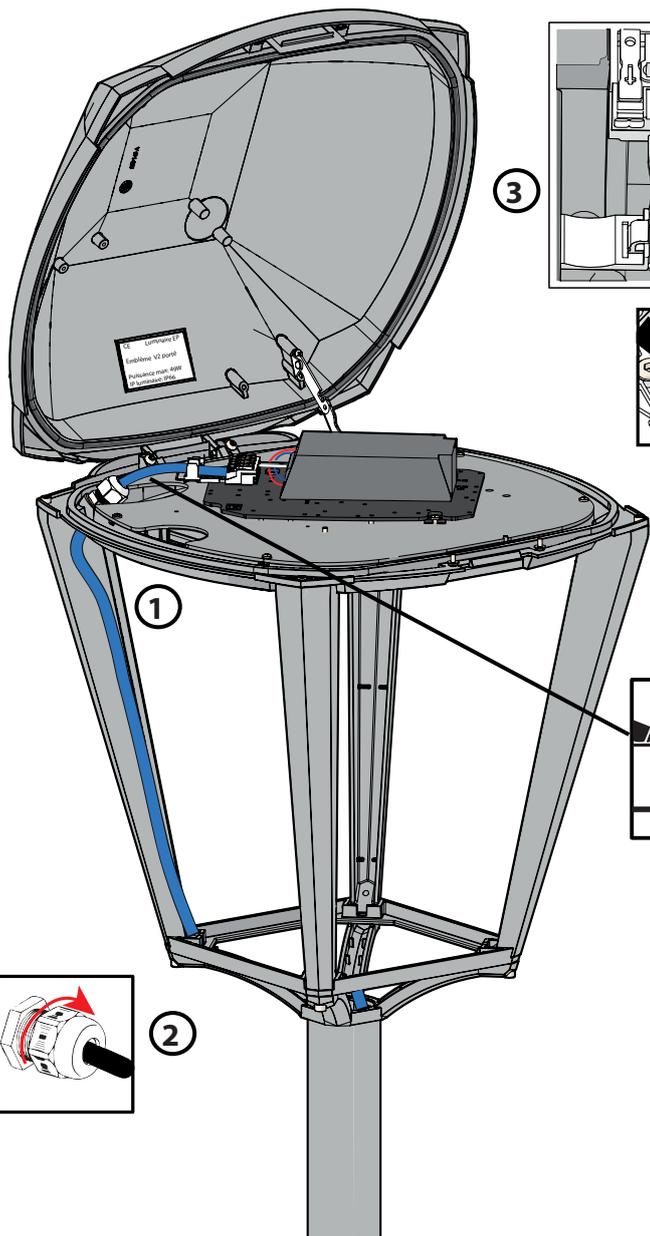


5

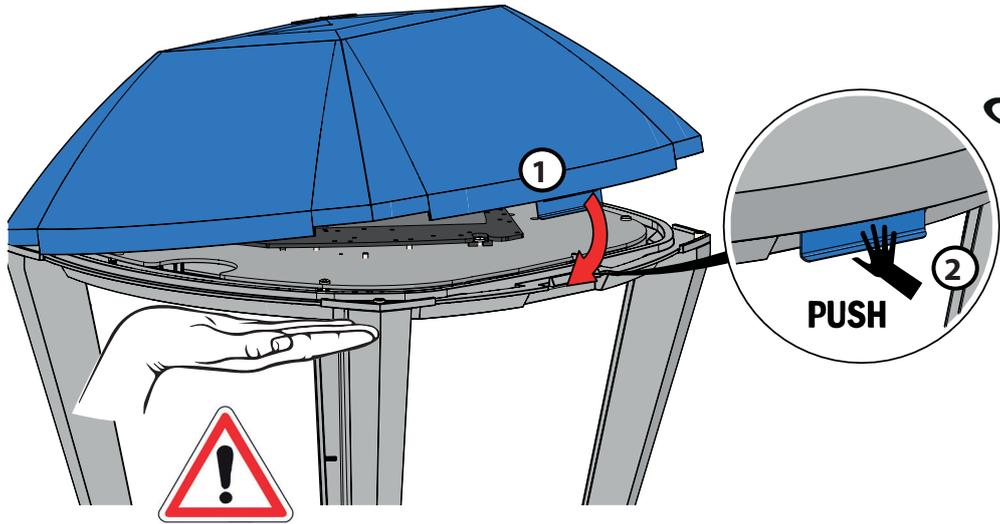


Maintenance

1

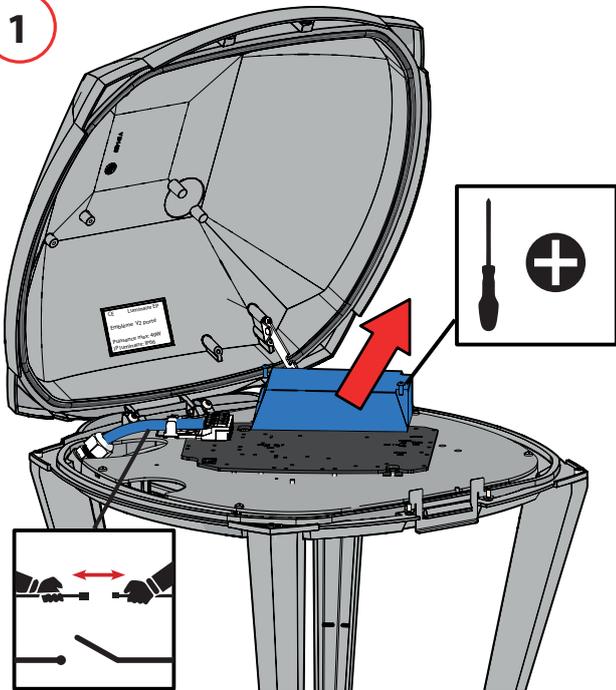

2

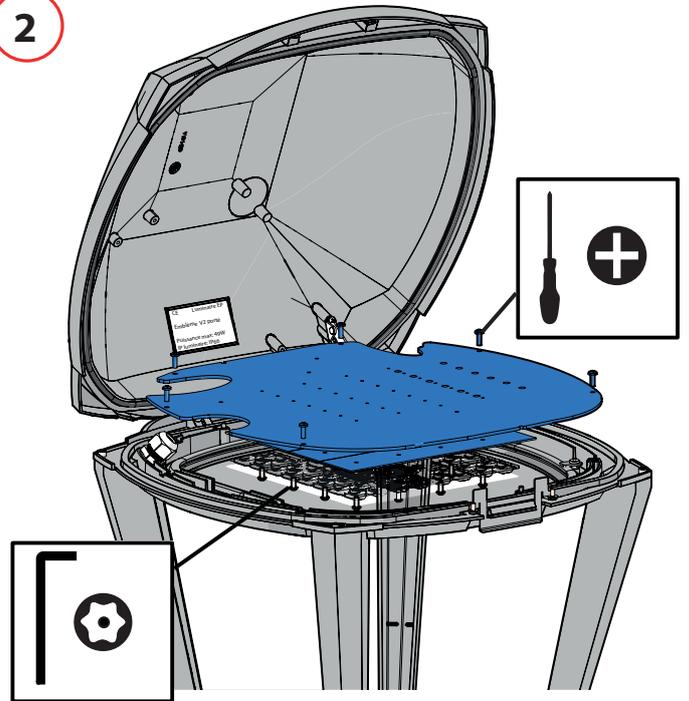

Nettoyage / Cleaning

