

FESTALED

AMBIANCE - RESIDENTIAL | FESTALED



www.ragnoli.com



- ▶ **Traditional lantern restyled in its LED version.**
- ▶ **Easy parallel connection to create fairy lights.**
- ▶ **Ideal for a touch of festivity.**

With its shape reminiscent of festive lighting lanterns, Festaled can be installed on its own or as a garland on a catenary. The upper part of the luminaire is made of aluminium and the sandblasted glass bowl can be fitted with a coloured filter (color temperatures 2200K, 2700K, 3000K and 4000K). The luminaire provides circular lighting to highlight squares, gardens, forecourts or pedestrian areas.

20/04/2023 - All informations are subject to change without notice.

FESTALED

LUMINAIRE'S SPECIFICATIONS

Luminaire's body

Weight	1.5 kg
Aerodynamic coefficient (C_xS)	0.020 m ²
Protection index	IP66
Materials	Aluminium



Optical unit & control gear

752lm (2200K), 820lm (2700K), 924lm (3000K) or 974lm (4000K) for 11 W total power. CRI > 70.

Materials	Frosted glass
Electric class	I
Protection index	IP66


Operating temperature: -40°C to +35°C (up to +50° under conditions).

20/04/2023 - All informations are subject to change without notice.



www.ragni.com

Dimensions (mm)

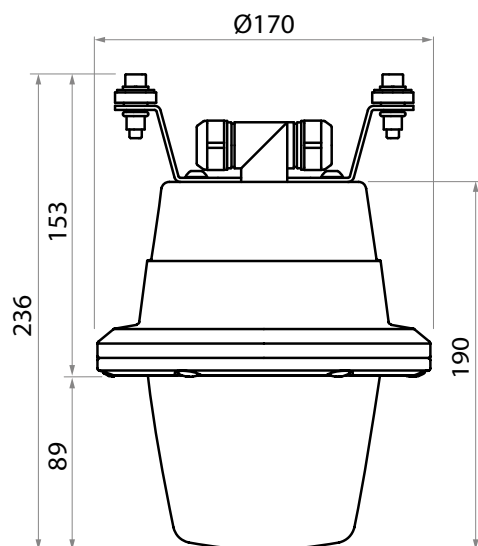

Colors examples



Options

- Colored lighting thanks to a color filter



Ecodesign

Member of the Global Compact since 2018, Ragni is committed to working towards the 17 Sustainable Development Goals (SDG 11, 12, 13, 15). Luminaire guaranteed free of hazardous substances.



ecosystem

Applicable standards

IEC/EN 60598-1 / IEC/EN 60598-2-3 / NF EN 60529 / NF EN 62262 / IEC/EN 55015 / IEC/EN 61547 / IEC/EN 61000-3.2 / IEC/EN 61000-3.3 / IEC/EN 62493 / IEC/EN 62031 / IEC/EN 62471 / IEC/EN 61347-1 / IEC/EN 61347-2-13 / NF EN 13201-3 / NF EN 13201-4 / EN 13032-1+A1 & EN 13032-4 / LM79 / NF EN 12981

20/04/2023 - All informations are subject to change without notice.